



OpreX™ Control Devices

## Digital Indicating Controller UTAdvanced


Digital Indicating Controller UT75A / UT55A / UT52A / UT35A / UT32A  
Program Controller UP55A / UP35A / UP32A  
Digital Indicator with Alarms UM33A



# Reliable and secure lineup

Welcome new members: 2-loop and DIN rail models, and the UP32A

# UTAdvanced™

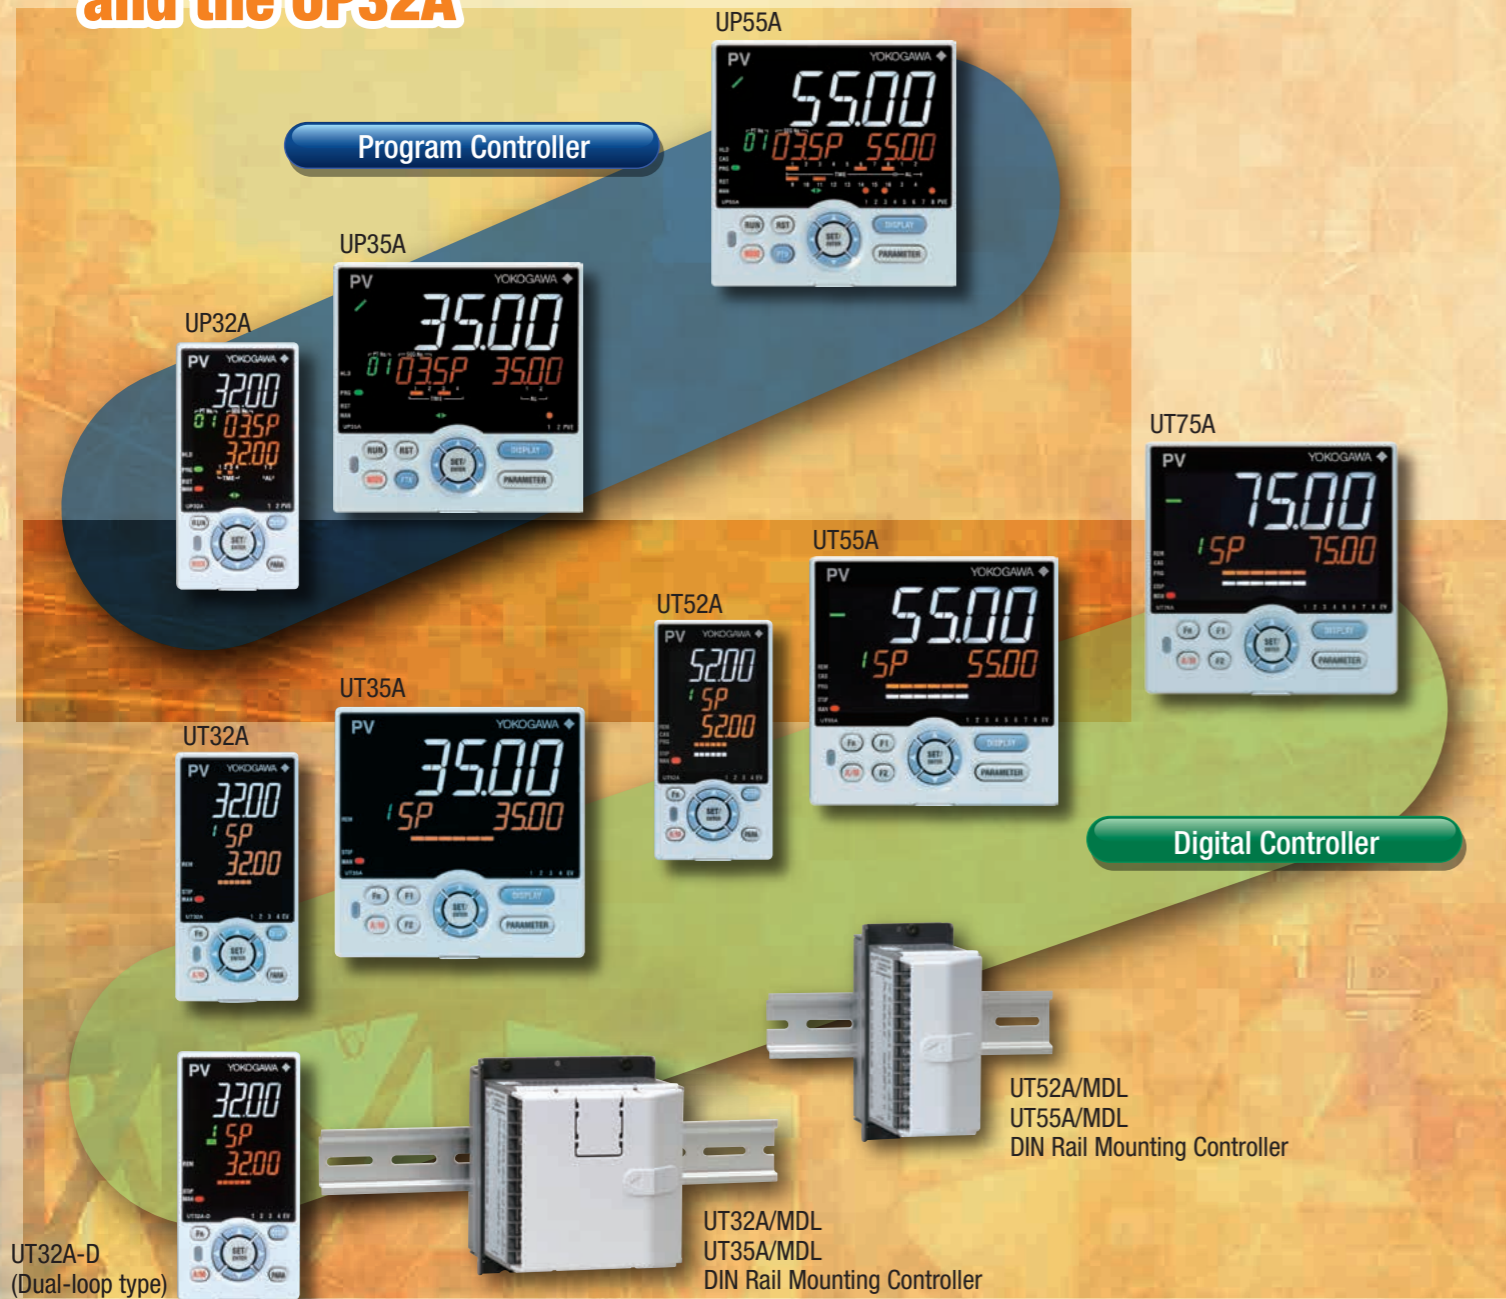

**Tools and functions that go easy on your equipment**

**Operation and clear display that go easy on the user**


**A variety of functions, and easy-to-connect communication**

**Helpful ladder sequence control function**

**Reliability** • RoHS/WEEE  
• NEMA4\*/IP66 Front Panel \* Hose down test only.



### Configuration and Programming Software

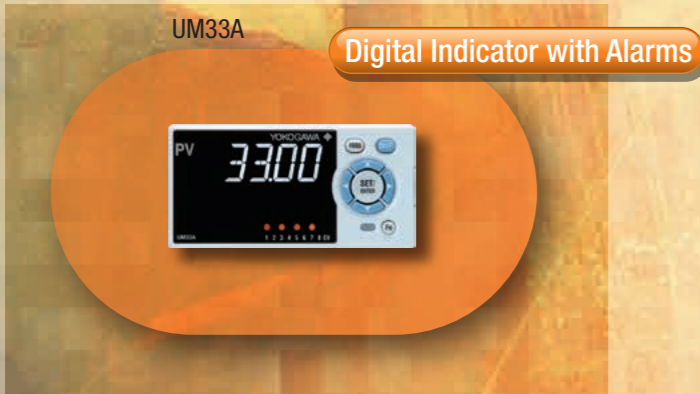


- Space saving options**
  - 1/8th DIN 2-loop controller (UT32A-D)
  - CC-Link communication available in a 48 x 96 mm (1/8 DIN) size
  - 1/8th DIN Program controller (UP32A)
  - DIN rail mounting controller (/MDL option)
- More UP55A program patterns**
  - 99 program patterns (/AP option)

## Setting and managing parameters

Easily edit settings from a PC while the unit is mounted on the controller board.


Settings are accessed through a dedicated adapter on the front panel. Maintenance of Ethernet-equipped controllers can be handled remotely.

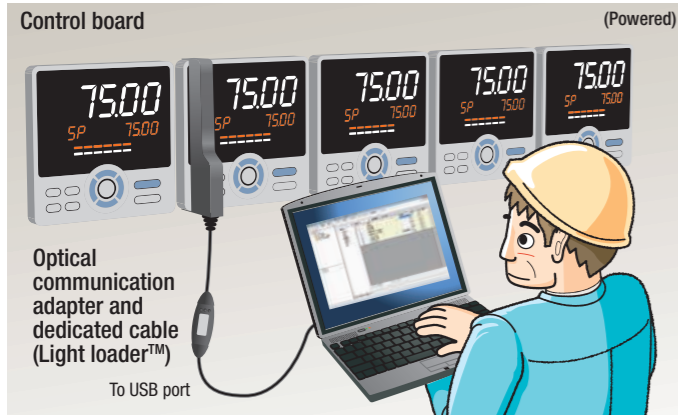

- Set up parameters
- Controller data read/write/compare
- Data management
- Print parameters and data, and create reports
- Configure user defaults

Set up right out of the box

No power cable required

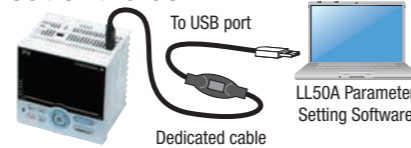


LL50A contents: Light-loader adapter, Dedicated cable

With DIN rail mountable controllers (/MDL option), used to perform maintenance when powered. Free software now available on the web for converting GREEN series parameters to UTAdvanced.

## Can be supported with a single spare unit

### Universal Input and Output

Supports different sensors, heaters, and actuators

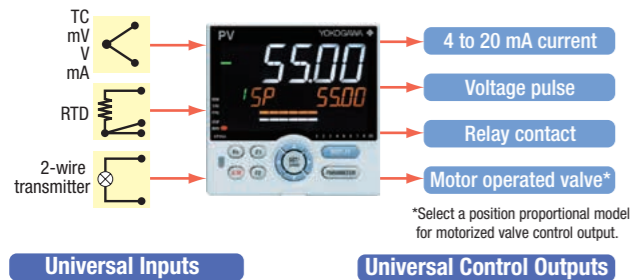

\*Select a position proportional model for motorized valve control output.

## Gets you back home. Fast.

### Shorter recovery time User defaults function


The LL50A lets you configure user default values.

Ever get lost in a maze of configuration changes? Now you can restore user-personalized default parameters. Recover quickly without disturbing operations.



## Save space on the panel and control board

Side-by-side close mounting on DIN rails in the board

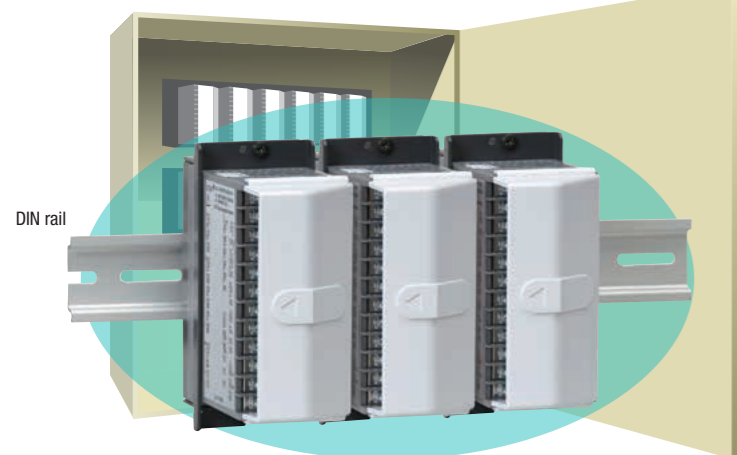

Status display (LED)

Green: Normal  
Red: Abnormal

- Ambient temperature: -10 to 50 °C (0 to 50 °C with CC-Link installed)
- 2-loop control in a single unit (UT32A-D/MDL)
- Displays controller and I/O status

UT32A/MDL  
UT52A/MDL  
UT32A-D/MDL

## Bright & Easy to Read Active Color LCD Display



UT55A 1/4 DIN (96x96mm) size

**Full size**  
PV display  
(text height: 21.55 mm)

**5 digit display**


**14 segment display**



UT52A 1/8 DIN (48x96mm) size

## Active Color PV Display


See the status of your process conditions **INSTANTLY!**

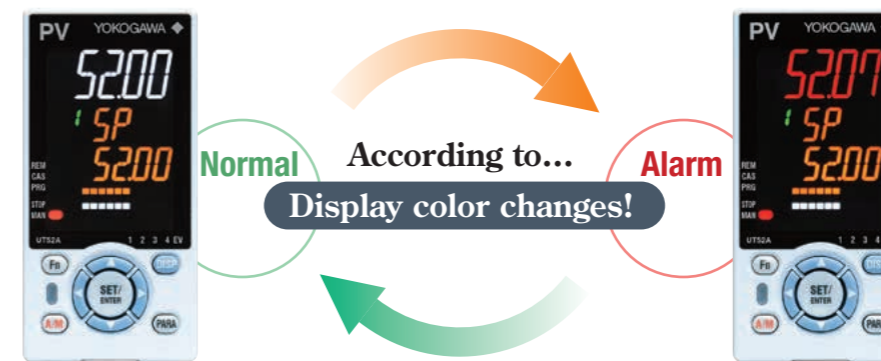

- Alarms
- Deviation values
- Measured values
- Contact input
- Choice of fixed white or red

## Navigation guides and keys make it easy to operate

Controller will guide the key you press.

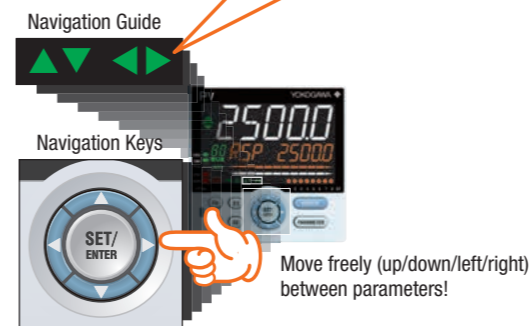


Move freely (up/down/left/right) between parameters!

## Fast one-touch operations

### Programmable Function Keys

You can assign frequently used operations (start/stop, remote/local, etc.) and parameter entry screens (PID value, etc.) to function keys for one-touch availability.

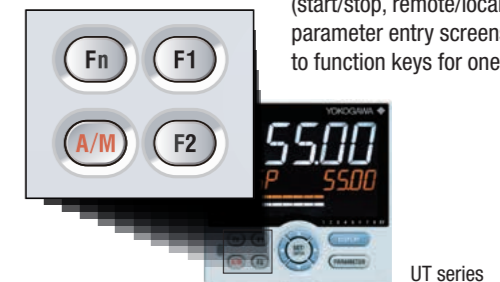

UT series

# A variety of functions, and easy-to-connect communication

# Helpful ladder sequence control function


## Communication protocol

Connect to PLCs easily without programming!



## Open Network

- Recipe management
- Remote monitoring

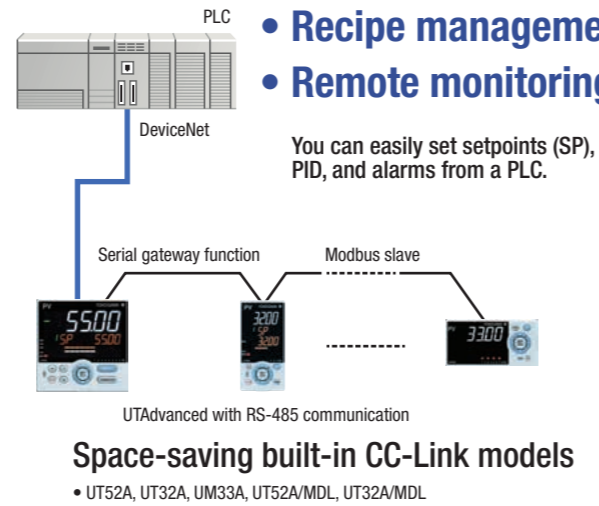


## Flexibly adapts to the customer's requirements

Using the UTAdvanced ladder sequence control function offers a low-cost alternative for applications typically dependent on compact units such as PLCs, timers, and relays. Plus, it saves wiring labor and space. The ladder sequence control function supports the customized specifications of your customers.

\* Requires parameter setting software (sold separately).

## Modbus/TCP

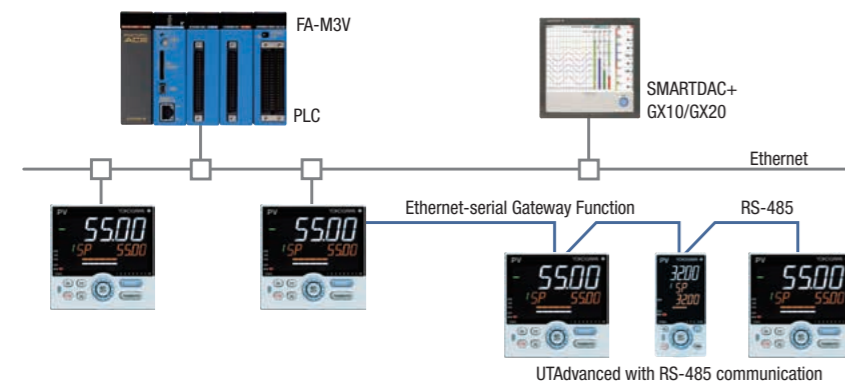

Modbus TCP, a protocol that allows the controller to connect to Ethernet network and have the ability to exchange data with the computers or devices on that network.


- Gateway function allows RS-485 Modbus devices to communicate via Ethernet.
- Physical layer: 10 BASE-T/100 BASE-TX
- Max. number of connection : 2

## Peer to Peer

The use of the ladder sequence program makes it possible to exchange analog data and status data between communication-capable UTs.

Example: A UT in which an input error occurs sends a signal to another UT to enable that UT switch to MAN operation, thus shifting the whole system into a safe mode. In such a case, the safety mechanism can be built into the UTAdvanced and is not required in the host system.


\* Create ladder sequence programs by the LL50A Parameter Setting software (sold separately).

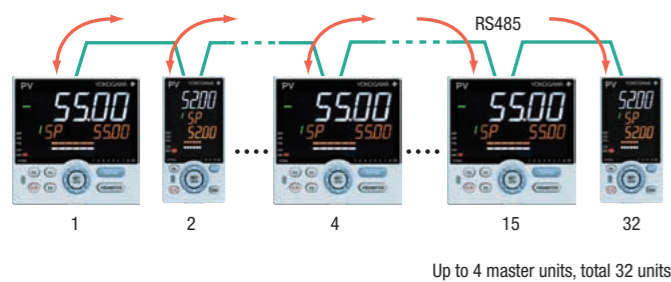

## Coordinated operation

Coordinated operation: This function syncs operation of the slave with that of the master through Yokogawa's proprietary communication protocol.

- Finely adjust the temperature setting of the slave with the bias and ratio
- Upstream PLC or other device not needed for tuning
- No programming means fewer engineering manhours

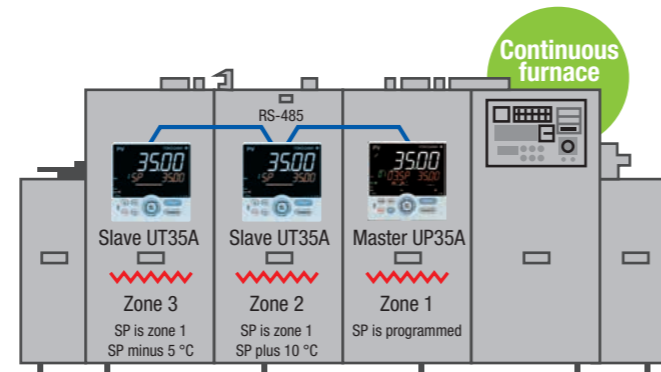

Example: Alarm annunciator


How it works

- Lamp blinks on alarm
- Lights while checking the active alarm
- Goes out while checking stopped alarm




Check alarms with function keys

Time Chart

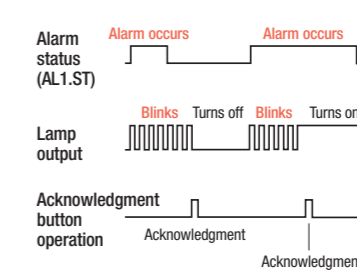

Alarm Ladder Sequence Program




Example: On delay timer


How it works

- Hold down the F1 key for 5 sec. or longer to turn relay ON
- Release F1 key to turn relay OFF

Time Chart



Program



# Product Line-up



Model	UT75A	UT55A	UT52A	UT35A
Size (W x H x D)	96×96×65mm		48×96×65mm	96×96×65mm
Weight	500 g or less			
DIN rail mountable (no display/keys)	No	Yes (option)		
Input sampling period (control scan period)	50, 100, 200ms		200ms	
Number of analog inputs	PV input	1		
	Aux. analog input	2 (max.)	3 (max.)	1 (max.)
PV input indication accuracy	±0.1 % of F.S.			
PV input type	TC : K, J, T, B, S, R, N, E, L, U, W, PL-2, PR20-40, W97Re3-W75Re25 RTD : JPt100, Pt100 mA : 4 to 20mA, 0 to 20mA mV, V : 1 to 5V, 0 to 10V, 0 to 2V, 0.4 to 2V, -10 to 20mV, 0 to 100mV			
Number of analog outputs	Control output	1 (max. 2)		
	Retransmission output	1		1 (only with 1 control output)
Control output type	Relay output : Contact rating (250VAC, 3A or 30 VDC, 3A) Normally open, 2 point (Heating/cooling output in UT52A/UT32A) Current output : 4 to 20mA, 0 to 20mA, 20 to 4mA, 20 to 0mA Voltage pulse output			
Retransmission output (aux. output)	4 to 20mA, 0 to 20mA, 20 to 4mA, 20 to 0mA			
Number of digital inputs	Standard	3	3	2
	Maximum	14	9	7
Number of digital outputs	Standard	3	3	3
	Maximum	8	18	8
Communication	RS485 Ethernet CC-Link PROFIBUS-DP DeviceNet		RS485 CC-Link	RS485 Ethernet CC-Link PROFIBUS-DP DeviceNet
Number of SP groups	20	8		4
Number of PID groups	16	8		4
Number of alarm groups	8	500		300
Number of ladder steps	1000	500		300
Number of ladder instructions	Basic instruction : 15 Application instruction : 111	Basic instruction : 13 Application instruction : 73		
Number of program patterns	Standard	1		
	Max. (option)	None		
Total number of segments	Standard	20		
	Max. (option)	None		
Power supply	100-240VAC or 24VAC/DC			
Power consumption (at 100 V AC)	18VA	15VA		18VA
Screw terminal size	M3.0			
24 V DC loop power supply	No	Yes (option)		
Heater burnout alarm	No	Yes (option) Excludes DIN rail mounting types		
Dust and waterproof level of front panel	NEMA4*/IP66 Front Panel Excludes DIN rail mounting types			
RoHS/WEEE	Compliant			
Safety and EMC standards				
GS (General Specifications)	GS 05P01B41-01EN	GS 05P01C31-01EN GS 05P01C81-01EN	GS 05P01D31-01EN GS 05P01D81-01EN	

Model	UT32A	UT32A-D	UP55A	UP35A	UP32A	UM33A
Size (W x H x D)	48×96×65mm		96×96×65mm		48×96×65mm	96×48×65mm
Weight	500 g or less					
DIN rail mountable (no display/keys)	Yes (option)			No		
Input sampling period (control scan period)	200ms		100, 200ms	200ms		50, 100, 200ms
Number of analog inputs	1	2	1			
	1 (non-isolated)	None	3 (max.)	None		
PV input indication accuracy	±0.1 % of F.S.					
PV input type	TC : K, J, T, B, S, R, N, E, L, U, W, PL-2, PR20-40, W97Re3-W75Re25 RTD : JPt100, Pt100 mA : 4 to 20mA, 0 to 20mA mV, V : 1 to 5V, 0 to 10V, 0 to 2V, 0.4 to 2V, -10 to 20mV, 0 to 100mV					
Number of analog outputs	1 (max. 2)	2	1 (max. 2)		None	
	1 (only with 1 control output)	None	1	1 (only with 1 control output)		
Control output type	Relay output : Contact rating (250VAC, 3A or 30 VDC, 3A) Normally open (UT32A-D) Normally open, 2 point (Heating/cooling output in UP32A) Current output : 4 to 20mA, 0 to 20mA, 20 to 4mA, 20 to 0mA Voltage pulse output		Relay output : Contact rating (250VAC, 3A or 30 VDC, 3A) Normally open (UT32A-D) Normally open, 2 point (Heating/cooling output in UP32A) Current output : 4 to 20mA, 0 to 20mA, 20 to 4mA, 20 to 0mA Voltage pulse output			
Retransmission output (aux. output)	4 to 20mA, 0 to 20mA, 20 to 4mA, 20 to 0mA	None	4 to 20mA, 0 to 20 mA, 20 to 4 mA, 20 to 0 mA			
Number of digital inputs	2	3	8	3	3	2
	4		9	8	5	
Number of digital outputs	3	3	8	3	3	3
	5		18	8	5	
Communication	RS485 CC-Link	RS485	RS485 Ethernet CC-Link PROFIBUS-DP DeviceNet		RS485 CC-Link	RS485 CC-Link
Number of SP groups	4	1		None		
Number of PID groups	8	4		8		
Number of alarm groups	300	500		300		
Number of ladder instructions	Basic instruction : 13 Application instruction : 67		Basic instruction : 13 Application instruction : 67			
Number of program patterns	None	30		2		
	None	99		4		
Total number of segments	None	300		20		
	None	600		40		
Power supply	100-240VAC or 24VAC/DC					
Power consumption (at 100 V AC)	15VA	18VA		15VA		
Screw terminal size	M3.0					
24 V DC loop power supply	Yes (option)			No		
Heater burnout alarm	Yes (option)	Yes (option) Excludes DIN rail mounting types		Yes (option)		
Dust and waterproof level of front panel	NEMA4*/IP66 Front Panel Excludes DIN rail mounting types					
RoHS/WEEE	Compliant					
Safety and EMC standards						
GS (General Specifications)	GS 05P01D31-01EN GS 05P01D81-01EN	GS 05P08D31-01EN GS 05P08D81-01EN	GS 05P02C41-01EN	GS 05P02D41-01EN		GS 05P03D21-01EN

# Product Line-up


## Digital Indicating Controller UT55A/UT52A (Standard model)



### Main Features

- Up to 4 analog inputs available
- 3 alarm relays with independent common terminals
- 500 steps of ladder logic control
- Simple operation
- Up to 18 DOs (various combinations available)

### External Dimensions

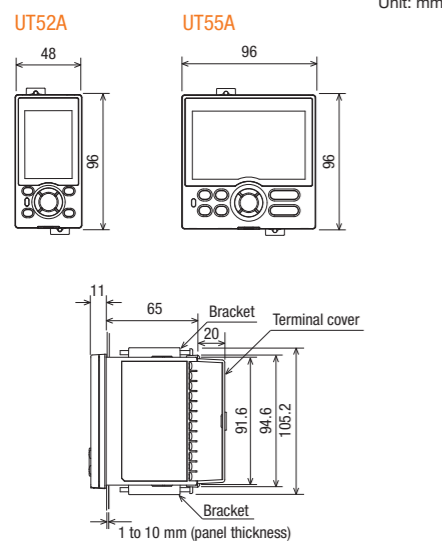

Model	Suffix code	Optional suffix code	Description
<b>UT55A</b>			Digital Indicating Controller (Power supply 100-240 V AC)(provided with retransmission output or 15 V DC loop power supply , 3 Dis, and 3 DOs)
Type 1:	-0		Standard type
Basic control	-1		Position proportional type
	-2		Heating/cooling type
	0		None
Type 2:Functions	1		Remote (1 additional aux. analog) input, 6 additional Dis, 5 additional DOs, and RS-485 communication (Max. 19.2 kbps, 2-wire/4-wire) <sup>(*)1</sup> / <sup>(*)2</sup>
	2		Remote (1 additional aux. analog) input, 1 additional DI, and RS-485 communication (Max. 19.2 kbps, 2-wire/4-wire) <sup>(*)2</sup>
	3		5 additional Dis and 5 additional DOs
	4		Remote (1 additional aux. analog) input and 1 additional DI
	5		Remote (1 additional aux. analog) input, 6 additional Dis, and 5 additional DOs
	6		5 additional Dis, and 15 additional DOs <sup>(*)3</sup>
	7		3 additional aux. analog inputs and 3 additional Dis
Type 3: Open networks	0		None
	1		RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire)
	2		Ethernet communication (with serial gateway function)
	3		CC-Link communication (with Modbus master function)
	4		PROFIBUS-DP communication (with Modbus master function)
Display language <sup>(*)3</sup>	-1		English (Default. Can be switched to other language by the setting.)
	-2		German (Default. Can be switched to other language by the setting.)
	-3		French (Default. Can be switched to other language by the setting.)
	-4		Spanish (Default. Can be switched to other language by the setting.)
Case color	0		White (Light gray)
	1		Black (Light charcoal gray)
Fixed code		-00	Always "-00"
Optional suffix codes		/DR	Additional direct input (TC & 3-wire/4-wire RTD) and current to Remote (1 additional aux. analog) input, 1 DI to be deleted <sup>(*)4</sup>
		/LP	24 V DC loop power supply <sup>(*)5</sup>
		/HA	Heater break alarm <sup>(*)5</sup>
		/DC	Power supply 24 V AC/DC
		/CT	Coating <sup>(*)6</sup>


\*1: When the Type 2 code is "1" or "6", only "0" can be specified for the Type 3 code.  
 \*2: When the /LP option is specified, the RS-485 communication of the Type 2 code "1" or "2" is 2-wire system.  
 \*3: English, German, French, and Spanish are available for the guide display.  
 \*4: The /DR option can be specified when the Type 2 code is any of "1", "2", "4", "5", or "7".  
 \*5: The /LP option can be specified in the combination of Type 2 code (any of "0", "2", "3", or "4") and Type 3 code (any of "0" or "1"). Additionally the /LP option can be specified in the combination of Type 2 code "1" and Type 3 code "0".  
 \*6: The /HA option can be specified only when the Type 1 code is "0".  
 \*7: When the /CT option is specified, the UT55A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

Model	Suffix code	Optional suffix code	Description
<b>UT52A</b>			Digital Indicating Controller (Power supply 100-240 V AC)(provided with retransmission output or 15 V DC loop power supply , 3 Dis, and 3 DOs)
Type 1:	-0		Standard type
Basic control	-1		Position proportional type
	-2		Heating/cooling type
Type 2: Functions	0		None
	1		Remote (1 additional aux. analog) input, 1 additional DI, and RS-485 communication (Max. 38.4 kbps, 2-wire)
	3		Remote (1 additional aux. analog) input and 1 additional DI 2 additional Dis, and 2 additional DOs
Type 3: Open networks	0		None
	3		CC-Link communication (with Modbus master function) <sup>(*)1</sup>
Display language <sup>(*)3</sup>	-1		English (Default. Can be switched to other language by the setting.)
	-2		German (Default. Can be switched to other language by the setting.)
	-3		French (Default. Can be switched to other language by the setting.)
	-4		Spanish (Default. Can be switched to other language by the setting.)
Case color	0		White (Light gray)
	1		Black (Light charcoal gray)
Fixed code		-00	Always "-00"
Optional suffix codes		/DR	Additional direct input (TC & 3-wire/4-wire RTD) and current to Remote (1 additional aux. analog) input, 1 DI to be deleted <sup>(*)3</sup>
		/LP	24 V DC loop power supply <sup>(*)4</sup>
		/HA	Heater break alarm <sup>(*)5</sup>
		/DC	Power supply 24 V AC/DC
		/CT	Coating <sup>(*)6</sup>


\*1: The Type 3 code "3" can be specified only when the Type 1 code is "-0" and the Type 2 code is "0."  
 \*2: English, German, French, and Spanish are available for the guide display.  
 \*3: The /DR option can be specified only when the Type 2 code is "-2" and the Type 3 code is "0."  
 \*4: The /LP option can be specified only when the Type 1 code is "-0" or "-1." Furthermore both Type 2 and Type 3 codes should be "0."  
 \*5: The /HA option can be specified only when the Type 1 code is "-0" and the Type 3 code is "0."  
 \*6: When the /CT option is specified, the UT52A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

### Application examples

#### • Cascade control

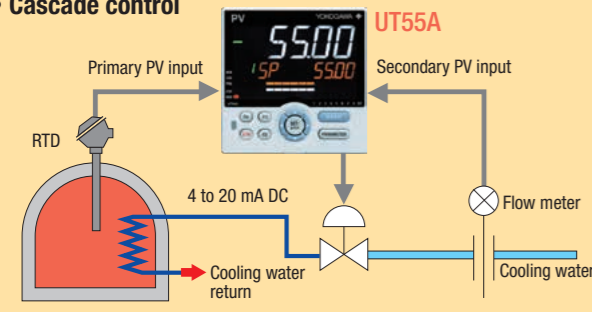

#### • Industrial furnace temperature control

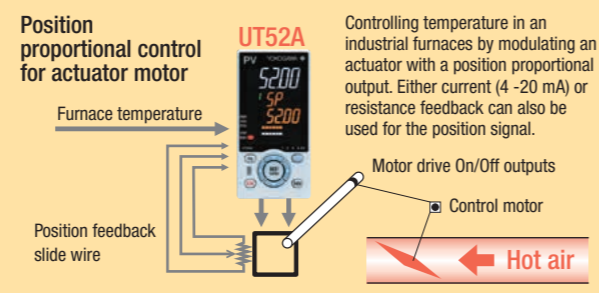


## Digital Indicating Controller UT35A/UT32A (Standard model)



### Main Features

- 4 target setpoints and PID sets available
- 3 alarm relays with independent common terminals
- 300 steps of ladder logic control
- Simple operation
- Up to 8 DOs (various combinations available)
- Maximum 4 points for alarm setting.

### External Dimensions

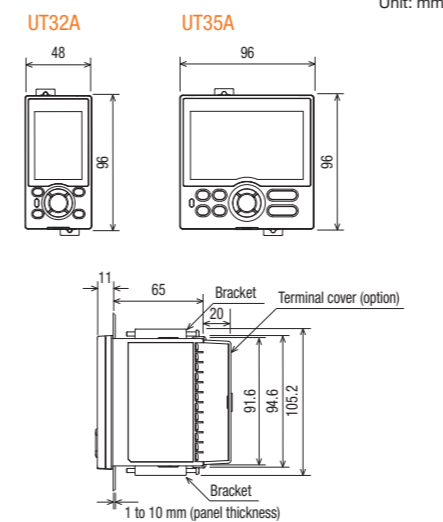

Model	Suffix code	Optional suffix code	Description
<b>UT35A</b>			Digital Indicating Controller (Power supply: 100-240 V AC)(provided with retransmission output or 15 V DC loop power supply, 2 Dis, and 3 DOs)
Type 1:	-0		Standard type
Basic control	-1		Position proportional type
	-2		Heating/cooling type
	0		None
Type 2:Functions	1		2 additional Dis, 2 additional DOs
	2		5 additional Dis, 5 additional DOs
Type 3: Open networks	0		None
	1		RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire)
	2		Ethernet communication (with serial gateway function)
	3		CC-Link communication (with Modbus master function)
	4		PROFIBUS-DP communication (with Modbus master function)
Display language <sup>(*)3</sup>	-1		English (Default. Can be switched to other language by the setting.)
	-2		German (Default. Can be switched to other language by the setting.)
	-3		French (Default. Can be switched to other language by the setting.)
	-4		Spanish (Default. Can be switched to other language by the setting.)
Case color	0		White (Light gray)
	1		Black (Light charcoal gray)
Fixed code		-00	Always "-00"
Optional suffix codes		/LP	24 V DC loop power supply <sup>(*)2</sup>
		/HA	Heater break alarm <sup>(*)3</sup>
		/DC	Power supply 24 V AC/DC
		/CV	Terminal cover
		/RSP	Non-isolated remote input (please see the General Specifications GS 05P01D31-81EN.)


\*1: English, German, French, and Spanish are available for the guide display.  
 \*2: The /LP option can be specified in the combination of Type 2 code (any of "0" or "1") and Type 3 code (any of "0" or "1").  
 \*3: The /HA option can be specified only when the Type 1 code is "0" or "2."  
 \*4: When the /CT option is specified, the UT35A does not conform to the safety standards (UL and CSA) and CE marking.

Model	Suffix code	Optional suffix code	Description
<b>UT32A</b>			Digital Indicating Controller (Power supply: 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 2 Dis, and 3 DOs)
Type 1:	-0		Standard type
Basic control	-1		Position proportional type
	-2		Heating/cooling type
	-V		UT32A Digital Indicating Controller (Entry model) (please see the General Specification GS 05P01F31-01EN.)
	-C		
Type 2:Functions	0		None
	1		RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire) <sup>(*)1</sup>
Type 3: Open networks	0		None
	3		CC-Link communication (with Modbus master function) <sup>(*)2</sup>
Display language <sup>(*)3</sup>	-1		English (Default. Can be switched to other language by the setting.)
	-2		German (Default. Can be switched to other language by the setting.)
	-3		French (Default. Can be switched to other language by the setting.)
	-4		Spanish (Default. Can be switched to other language by the setting.)
Case color	0		White (Light gray)
	1		Black (Light charcoal gray)
Fixed code		-00	Always "-00"
Optional suffix codes		/LP	24 V DC loop power supply <sup>(*)4</sup>
		/HA	Heater break alarm <sup>(*)5</sup>
		/DC	Power supply 24 V AC/DC
		/CV	Terminal cover
		/RSP	Non-isolated remote input (please see the General Specifications GS 05P01D31-81EN.)


\*1: When the /LP option is specified, the RS-485 communication of the Type 2 code "1" is 2-wire system.  
 \*2: The type 3 code "3" can be specified only when the Type 1 code is "-0" and the Type 2 code is "0."  
 \*3: English, German, French, and Spanish are available for the guide display.  
 \*4: The /LP option can be specified in the combination of Type 1 code (any of "0" or "1"), Type 2 code (any of "0" or "1") and Type 3 code "0".  
 \*5: The /HA option can be specified only when the Type 1 code is "-0" or "2."  
 \*6: When the /CT option is specified, the UT32A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

### Application examples

#### • Electric furnace

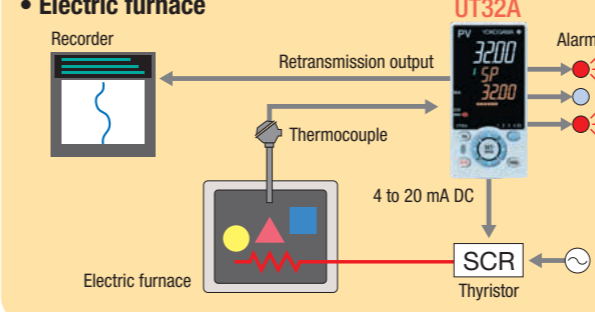

#### • Heating/cooling control

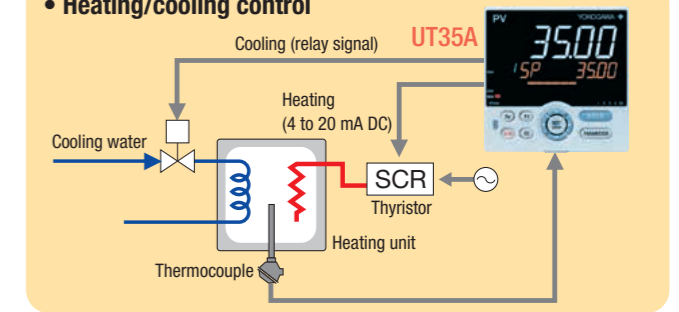

# Product Line-up

## DIN Rail Mounting Controller



### Main Features

- DIN rail mounting
- Tidy appearance
- Up to 4 analog inputs available
- 3 alarm relays with independent common terminals
- 500 steps of ladder logic control
- Comes with a wealth of functions

Model	Suffix code	Optional suffix code	Description
<b>UT55A</b>		<b>/MDL</b> (Required)	Digital Indicating Controller (Power supply 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 3 Dis, and 3 DOs) (without the display parts and keys)
Type 1: Basic control	-0		Standard type
	-2		Heating/cooling type
Type 2: Functions	0		None
	2		Remote (1 additional aux. analog) input, 1 additional DI, and RS-485 communication (Max.19.2 kbps, 2-wire or 2-wire/4-wire) <sup>(*)1</sup>
	3		5 additional Dis and 5 additional DOs
	4		Remote (1 additional aux. analog) input and 1 additional DI
	5		Remote (1 additional aux. analog) input, 6 additional Dis, and 5 additional DOs
	7		3 additional aux. analog inputs and 3 additional Dis
Type 3: Open networks	1		RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire)
	2		Ethernet communication (with serial gateway function)
	3		CC-Link communication (with Modbus master function)
	4		PROFIBUS-DP communication (with Modbus master function)
	5		DeviceNet communication (with Modbus master function)
Fixed code	-1		Temperature unit: deg C & deg F
Case color	1		Black (Light charcoal gray)
Fixed code	-00		Always "-00"
Optional suffix codes		<b>/MDL</b> (Required)	Mount on DIN rail (without the display parts and keys) <sup>(**)</sup>
		<b>/DC</b>	Power supply 24 V AC/DC
		<b>/LP</b>	24 V DC loop power supply <sup>(**)</sup>
		<b>/CT</b>	Coating <sup>(**)</sup>

- \*1: When the /LP option is specified, the RS-485 communication of the Type 2 code "2" is 2-wire system.  
 \*2: The /MDL option and /LP option can be specified in the combination of Type 2 code (any of "0", "2", "3", or "4") and Type 3 code "1".  
 \*3: When the /CT option is specified, the UT55A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).


Model	Suffix code	Optional suffix code	Description
<b>UT52A</b>		<b>/MDL</b> (Required)	Digital Indicating Controller (Power supply 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 3 Dis, and 3 DOs) (without the display parts and keys)
Type 1: Basic control	-0		Standard type
Type 2: Functions	0		None
	1		Remote (1 additional aux. analog) input, 1 additional DI, and RS-485 communication (Max. 38.4 kbps, 2-wire)
Type 3: Open networks	0		None
	3		CC-Link communication (with Modbus master function)
Fixed code	-1		Temperature unit: deg C & deg F
Case color	1		Black (Light charcoal gray)
Fixed code	-00		Always "-00"
Optional suffix codes		<b>/MDL</b> (Required)	Mount on DIN rail (without the display parts and keys) <sup>(**)</sup>
		<b>/DC</b>	Power supply 24 V AC/DC
		<b>/CT</b>	Coating <sup>(**)</sup>

- \*1: When the /MDL option is specified, the model and the suffix codes are as follows:  
 UT52A-010-11-00/x/MDL  
 UT52A-003-11-00/x/MDL  
 \*2: When the /CT option is specified, the UT52A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).


### External Dimensions

UT55A/UT35A (with option /MDL)

Unit: mm

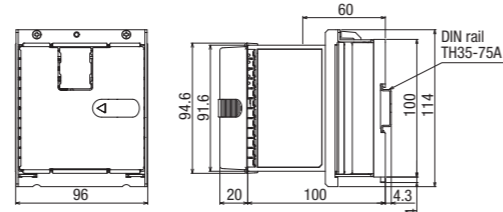

UT52A/UT32A (with option /MDL)

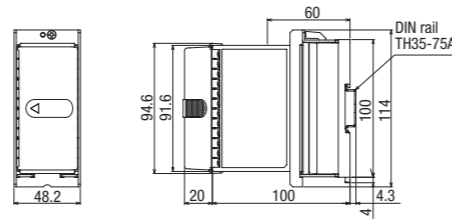

UT55A/UT52A: terminal cover comes standard  
 UT35A/UT32A: terminal cover sold separately

Model	Suffix code	Optional suffix code	Description
<b>UT35A</b>		<b>/MDL</b> (Required)	Digital Indicating Controller (Power supply: 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 2 Dis, and 3 DOs) (without the display parts and keys)
Type 1: Basic control	-0		Standard type
	-2		Heating/cooling type
Type 2: Functions	0		None
	2		5 additional Dis, 5 additional DOs
Type 3: Open networks	1		RS-485 communication (Max.38.4 kbps, 2-wire/4-wire)
	2		Ethernet communication (with serial gateway function)
	3		CC-Link communication (with Modbus master function)
	4		PROFIBUS-DP communication (with Modbus master function)
	5		DeviceNet communication (with Modbus master function)
Fixed code	-1		Temperature unit: deg C & deg F
Case color	1		Black (Light charcoal gray)
Fixed code	-00		Always "-00"
Optional suffix codes		<b>/MDL</b> (Required)	Mount on DIN rail (without the display parts and keys) <sup>(**)</sup>
		<b>/LP</b>	24 V DC loop power supply <sup>(**)</sup>
		<b>/DC</b>	Power supply 24 V AC/DC
		<b>/CT</b>	Coating <sup>(**)</sup>
		<b>/CV</b>	Terminal cover

- \*1: The /MDL option and /LP option can be specified in the combination of Type 2 code "0" and Type 3 code "1".  
 \*2: When the /CT option is specified, the UT35A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

Model	Suffix code	Optional suffix code	Description
<b>UT32A</b>		<b>/MDL</b> (Required)	Digital Indicating Controller (Power supply: 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 2 Dis, and 3 DOs) (without the display parts and keys)
Type 1: Basic control	-0		Standard type
	-2		Heating/cooling type
Type 2: Functions	0		None
	1		RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire) <sup>(**)</sup>
Type 3: Open networks	0		None
	3		CC-Link communication (with Modbus master function)
Fixed code	-1		Temperature unit: deg C & deg F
Case color	1		Black (Light charcoal gray)
Fixed code	-00		Always "-00"
Optional suffix codes		<b>/MDL</b> (Required)	Mount on DIN rail (without the display parts and keys) <sup>(**)</sup> (*3)
		<b>/LP</b>	24 V DC loop power supply <sup>(**)</sup>
		<b>/HA</b>	Heater break alarm <sup>(**)</sup>
		<b>/DC</b>	Power supply 24 V AC/DC
		<b>/CT</b>	Coating <sup>(**)</sup>
		<b>/CV</b>	Terminal cover

- \*1: When /LP option is specified, the RS-485 communication of the type 2 code "1" is 2-wire system.  
 \*2: The /MDL option is specified, the model and suffix codes are as follows:  
 UT32A-010-11-00/x/MDL  
 UT32A-003-11-00/x/MDL  
 \*3: When /MDL option and /LP option is combined, "3" can not be specified for Type 3 code.  
 \*4: The /HA option can be specified only in the combination of Type2 code "1" and Type 3 code "0."  
 \*5: When the /CT option is specified, the UT32A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

## Dual-loop Controller UT32A-D




### Main Features

- Dual-loop control
- Space-saving
- Simple operation
- Ladder sequence programs can be built
- 3 alarms available as standard


### External Dimensions

UT32A-D

Unit: mm

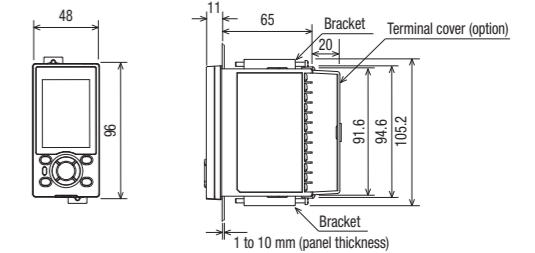

UT32A-D (with option /MDL)

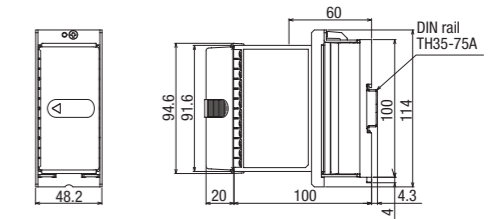

### Panel mounting

Model	Suffix code	Optional suffix code	Description
<b>UT32A</b>			Digital Indicating Controller (Power supply: 100-240 V AC) (provided with 3 Dis and 3 DOs)
Type 1: Basic control	-D		Dual-loop type
Type 2: Functions	0		None
	1		RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire)
Type 3: Fixed code	0		None
	-1		English (Default. Can be switched to other language by the setting.)
	-2		German (Default. Can be switched to other language by the setting.)
	-3		French (Default. Can be switched to other language by the setting.)
	-4		Spanish (Default. Can be switched to other language by the setting.)
Display language <sup>(**)</sup>			White (Light gray)
Case color	0		Black (Light charcoal gray)
Fixed code	1		Always "-00"
Optional suffix codes		<b>/HA</b>	Heater break alarm <sup>(**)</sup>
		<b>/DC</b>	Power supply 24 V AC/DC
		<b>/CT</b>	Coating <sup>(**)</sup>
		<b>/CV</b>	Terminal cover

- \*1: English, German, French, and Spanish are available for the guide display.  
 \*2: The /HA option can be specified when the Type 2 code is "0".  
 \*3: When the /CT option is specified, the UT32A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).


### DIN rail mounting

Model	Suffix code	Optional suffix code	Description
<b>UT32A</b>		<b>/MDL</b> (Required)	Digital Indicating Controller (Power supply: 100-240 V AC) (provided with 3 Dis, and 3 DOs) (without the display parts and keys)
Type 1: Basic control	-D		Dual-loop type
Type 2: Functions	1		RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire)
Type 3: Fixed code	0		None
Fixed code	-1		Temperature unit: deg C & deg F
Case color	1		Black (Light charcoal gray)
Fixed code	-00		Always "-00"
Optional suffix codes		<b>/MDL</b> (Required)	Mount on DIN rail (without the display parts and keys)
		<b>/DC</b>	Power supply 24 V AC/DC
		<b>/CT</b>	Coating <sup>(**)</sup>
		<b>/CV</b>	Terminal cover


- \*1: When the /CT option is specified, the UT32A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

## Application examples

### Incubator control

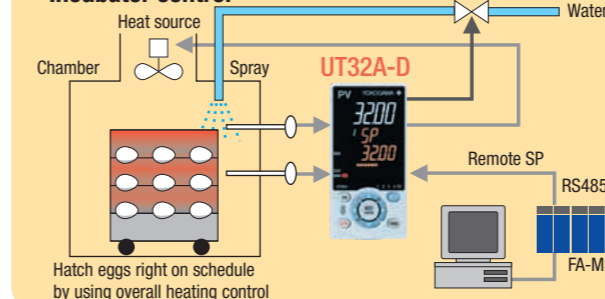

### Control of reflow furnaces

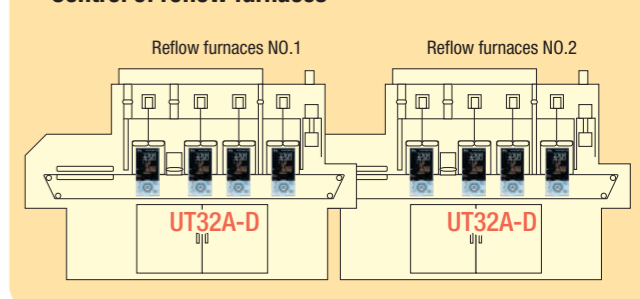

# Product Line-up


## Digital Indicating Controller UT75A



Model	Suffix code	Optional suffix code	Description
UT75A			Digital Indicating Controller (provided with retransmission output or 15 V DC loop power supply, 3 DIs, and 3 DOs) (Power supply 100-240 V AC)
Type 1: Basic control	-0		Standard type
	-1		Position proportional type
	-5		Dual-loop type
Type 2: Functions	0		5 additional DIs and 5 additional DOs
	1		Remote (1 additional aux. analog) input, RS485 communication (Max.19.2 kbps, 2-wire), 1 additional DI, and 5 additional DOs
	2		Remote (2 additional aux. analog) inputs, RS485 communication (Max.19.2 kbps, 2-wire), 2 additional DIs
	3		Remote (1 additional aux. analog) input, 6 additional DIs, 5 additional DOs <sup>(*)</sup>
Type 3: Open networks	0		None
	1		RS-485 communication (Max.38.4 kbps, 2-wire/4-wire) and 5 additional DIs
	2		Ethernet communication (with serial gateway function)
	3		CC-Link communication (with Modbus master function)
	4		PROFIBUS-DP communication (with Modbus master function)
	5		DeviceNet communication (with Modbus master function)
Display language <sup>(2)</sup>	-1		English (Default. Can be switched to Spanish by the setting.)
	-2		German (Customized order)
	-3		French (Customized order)
	-4		Spanish (Default. Can be switched to English by the setting.)
Case color	0		White (Light gray)
	1		Black (Light charcoal gray)
Fixed code		-00	Always "-00"
Optional suffix codes		/DC	Power supply 24 V AC/DC
		/CP	Carbon potential calculation function <sup>(3)</sup>
		/CT	Coating <sup>(4)</sup>

\*1: When Type 1 code is "-5", "3" cannot be specified for Type 2 code.  
 \*2: English and Spanish are available for the guide display.  
 (German and French guide displays are customized. Contact our representatives for inquiries.)  
 \*3: Only when Type 2 code is "1", "2" or "3", the /CP option can be specified.  
 \*4: When the /CT option is specified, the UT75A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).


### External Dimensions

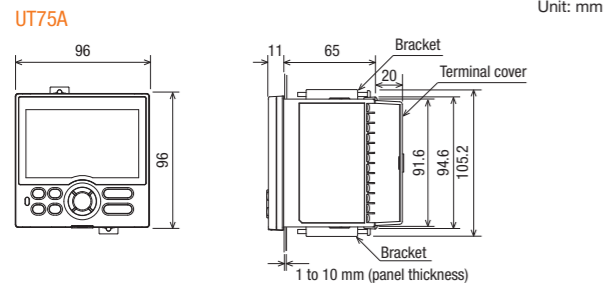

Unit: mm


## Enhancing Productivity by Managing a Variety of Recipes

### Switching between 20 Recipes

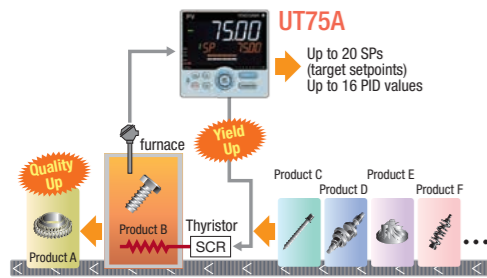


### Program pattern operation

- Program pattern consists of up to 20 segments
- 2-loop program pattern can be operated

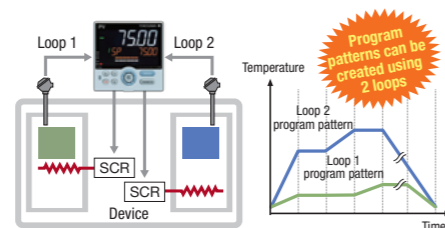

### Easy to switch between recipes with a PLC

- Since CC-Link, Profibus, and DeviceNet are supported, it is easy to link to a PLC that manages recipes

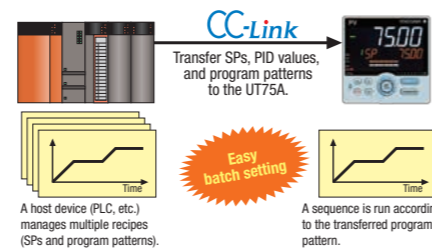

## Application examples


### 2-loop control with a single controller

- 2-loop synchronous and independent operation is available

The start and stop instructions can be run synchronously or independently.


- Program pattern operation and constant value operation are available for 2-loop control

A sequence can be run by combining the program pattern operation and fixed-point operation.

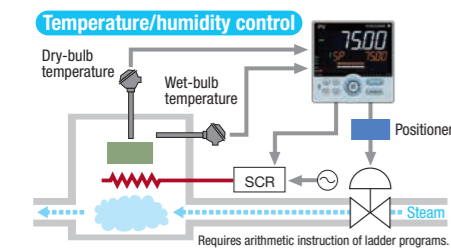


### A variety of arithmetic instructions and large capacity ladder programs

- 15 basic instructions and 111 application instructions
- Ladder program capacity up to 1,000 steps

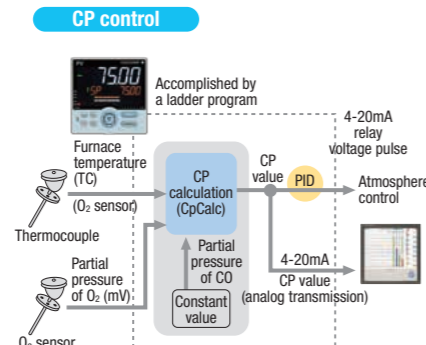

- Square root, exponential, and logarithmic calculations are available
- Temperature/humidity and CP calculations are available

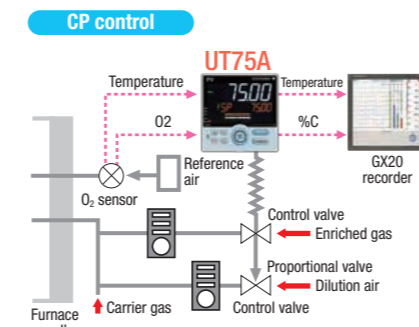


## Program Controller UP55A (Standard model)



### Main Features

- Up to 99 program patterns
- 8 PV events, 16 time events, and 8 alarms can be monitored simultaneously
- Ladder sequence programs can be built
- Simple operation
- Up to 9 DIs and 18 DOs (combinations available)

### External Dimensions

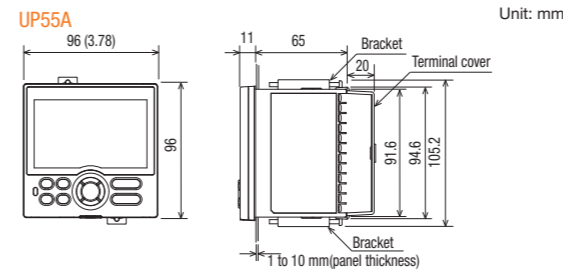

Unit: mm

Model	Suffix code	Optional suffix code	Description
UP55A			Program Controller (Power supply: 100-240 V AC) 30 program patterns / 300 program segments (99 program patterns / 600 program segments when the option /AP is specified. Max. 99 segments per pattern) (provided with retransmission output or 15 V DC loop power supply, 8 DIs, and 8 DOs)
Type 1: Basic control	-0		Standard type
	-1		Position proportional type
	-2		Heating/cooling type
Type 2: Functions	0		None
	1		Remote (1 additional aux. analog) input, 1 additional DI
	2		RS-485 communication (Max.19.2 kbps, 2-wire/4-wire)
	3		10 additional DOs <sup>(*)</sup>
	4		3 additional aux. analog inputs, 2 DIs and 5 DOs to be deleted
Type 3: Open networks	0		None
	1		RS-485 communication (Max.38.4 kbps, 2-wire/4-wire)
	2		Ethernet communication (with serial gateway function)
	3		CC-Link communication (with Modbus master function)
	4		PROFIBUS-DP communication (with Modbus master function)
	5		DeviceNet communication (with Modbus master function)
Display language <sup>(2)</sup>	-1		English (Default. Can be switched to other language by the setting.)
	-2		German (Default. Can be switched to other language by the setting.)
	-3		French (Default. Can be switched to other language by the setting.)
	-4		Spanish (Default. Can be switched to other language by the setting.)
Case color	0		White (Light gray)
	1		Black (Light charcoal gray)
Fixed code		-00	Always "-00"
Optional suffix codes		/AP	69 additional patterns/300 additional segments
		/DR	Additional direct input (TC and 3-wire/4-wire RTD) and current input to Remote (1 additional aux. analog) input, 1 DI to be deleted <sup>(3)</sup>
		/HA	Heater break alarm <sup>(4)</sup>
		/DC	Power supply 24 V AC/DC
		/CT	Coating <sup>(5)</sup>

\*1: When the Type 2 code is "3", only "0" can be specified for the Type 3 code.  
 \*2: English, German, French, and Spanish are available for the guide display.  
 \*3: The /DR option can be specified only when the Type 2 code is "1" or "4."  
 \*4: The /HA option can be specified only when the Type 1 code is "-0."  
 \*5: When the /CT option is specified, the UP55A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).


## Program Controller UP35A/UP32A (Standard model)



### Main Features

- Up to 4 program patterns
- 2 PV events, 4 time events, and 2 alarms can be monitored simultaneously
- Ladder sequence programs can be built
- Simple operation
- Up to 8 DIs and 8 DOs (combinations available)

### External Dimensions

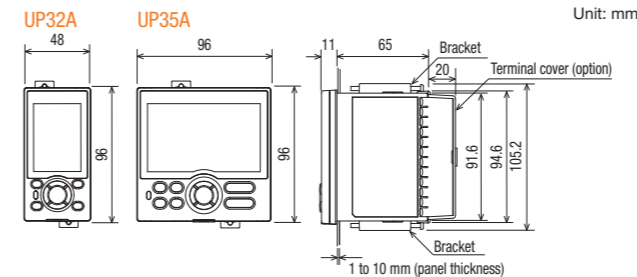

Unit: mm

UP35A \*1: English, German, French, and Spanish are available for the guide display.  
 \*2: The /HA option can be specified only when the Type 1 code is "-0" or "-2."  
 \*3: When the /CT option is specified, the UP35A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).  
 UP32A \*1: Type 3 code "3" can be specified only when both Type 1 and Type 2 code are "0".  
 \*2: English, German, French, and Spanish are available for the guide display.  
 \*3: The /HA option can be specified only when the Type 1 code is "-0" or "-2" and Type 3 code is "0".  
 \*4: When the /CT option is specified, the UP32A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

Model	Suffix code	Optional suffix code	Description
UP35A			Program Controller (Power supply: 100-240 V AC) 2 program patterns / 20 program segments (When the /AP option is specified, 4 program patterns / 40 program segments, max. 20 segments per pattern) (provided with retransmission output or 15 V DC loop power supply, 3 DIs, and 3 DOs)
Type 1: Basic control	-0		Standard type
	-1		Position proportional type
	-2		Heating/cooling type
Type 2: Functions	0		None
	1		5 additional DIs, 5 additional DOs
Type 3: Open networks	0		None
	1		RS-485 communication (Max.38.4 kbps, 2-wire/4-wire)
	2		Ethernet communication (with serial gateway function)
	3		CC-Link communication (with Modbus master function)
	4		PROFIBUS-DP communication (with Modbus master function)
	5		DeviceNet communication (with Modbus master function)
Display language <sup>(2)</sup>	-1		English (Default. Can be switched to other language by the setting.)
	-2		German (Default. Can be switched to other language by the setting.)
	-3		French (Default. Can be switched to other language by the setting.)
	-4		Spanish (Default. Can be switched to other language by the setting.)
Case color	0		White (Light gray)
	1		Black (Light charcoal gray)
Fixed code		-00	Always "-00"
Optional suffix codes		/AP	2 additional patterns/20 additional segments
		/HA	Heater break alarm <sup>(3)</sup>
		/DC	Power supply 24 V AC/DC
		/CT	Coating <sup>(4)</sup>
		/CV	Terminal Cover

Model	Suffix code	Optional suffix code	Description
UP32A			Program Controller (Power supply: 100-240 V AC) 2 program patterns / 20 program segments (When the /AP option is specified, 4 program patterns / 40 program segments, max. 20 segments per pattern) (provided with retransmission output or 15 V DC loop power supply, 3 DIs, and 3 DOs)
Type 1: Basic control	-0		Standard type
	-1		Position proportional type
	-2		Heating/cooling type
Type 2: Functions	0		None
	1		RS-485 communication (Max.38.4 kbps, 2-wire/4-wire)
	2		2 additional DIs, 2 additional DOs
Type 3: Open networks	0		None
	3		CC-Link communication (with Modbus master function) <sup>(*)</sup>
Display language <sup>(2)</sup>	-1		English (Default. Can be switched to other language by the setting.)
	-2		German (Default. Can be switched to other language by the setting.)
	-3		French (Default. Can be switched to other language by the setting.)
	-4		Spanish (Default. Can be switched to other language by the setting.)
Case color	0		White (Light gray)
	1		Black (Light charcoal gray)
Fixed code		-00	Always "-00"
Optional suffix codes		/AP	2 additional patterns/20 additional segments
		/HA	Heater break alarm <sup>(3)</sup>
		/DC	Power supply 24 V AC/DC
		/CT	Coating <sup>(4)</sup>
		/CV	Terminal Cover

# Product Line-up

# Main Features


## Digital Indicator with Alarms UM33A



### Main Features

- Up to 9 alarm outputs (including one Fail)
- Input correction function (PV bias, polygonal line approximation, polygonal line bias)
- 24 VDC sensor power supply available
- Simple operation
- CC-Link communication support

### External Dimensions

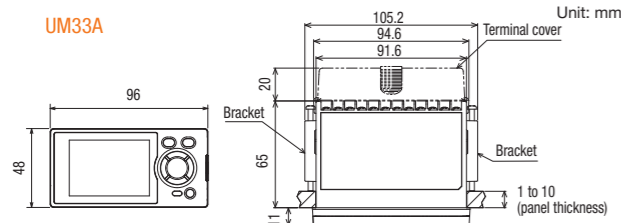


Model	Suffix code	Optional suffix code	Description
UM33A			Digital Indicator with Alarms (Power supply: 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 2 Dis, and 3 DOs)
Type 1: Basic	-0		Standard type
Type 2: Functions	0		None
	1		1 additional DO (c-contact relay), RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire) <sup>(*)1</sup>
	2		1 additional DO (c-contact relay)
	3		6 additional DOs (c-contact relay; 1 point and open collector; 5 points)
Type 3:	0		None
Open networks	3		CC-Link communication (with Modbus master function) <sup>(**)</sup>
	-1		English (Default. Can be switched to other language by the setting.)
	-2		German (Default. Can be switched to other language by the setting.)
	-3		French (Default. Can be switched to other language by the setting.)
Display language <sup>(**)</sup>	-4		Spanish (Default. Can be switched to other language by the setting.)
Case color	0		White (Light gray)
	1		Black (Light charcoal gray)
Optional suffix codes	/LP		24 V DC loop power supply <sup>(**)</sup>
	/DC		Power supply 24 V AC/DC
	/CT		Coating <sup>(**)</sup>
	/CV		Terminal cover
	/S006		Modbus RTU Master/Data monitoring function

<sup>(\*)1</sup>: When /LP option is specified, the RS-485 communication of the Type 2 code "1" is 2-wire system.  
<sup>(\*)2</sup>: Type 3 code "3" can be specified only when the Type 2 code is "0" or "2".  
<sup>(\*)3</sup>: English, German, French, and Spanish are available for the guide display.  
<sup>(\*)4</sup>: The /LP option can be specified only when the code for Type 2 code is any of "0", "1" or "2", and the Type 3 code is "0".  
<sup>(\*)5</sup>: When the /CT option is specified, the UM33A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

5 digits, 14-segment large LCD display with PV color changing function  
 You can set the display to change colors during alarms.

### Active Color PV Display

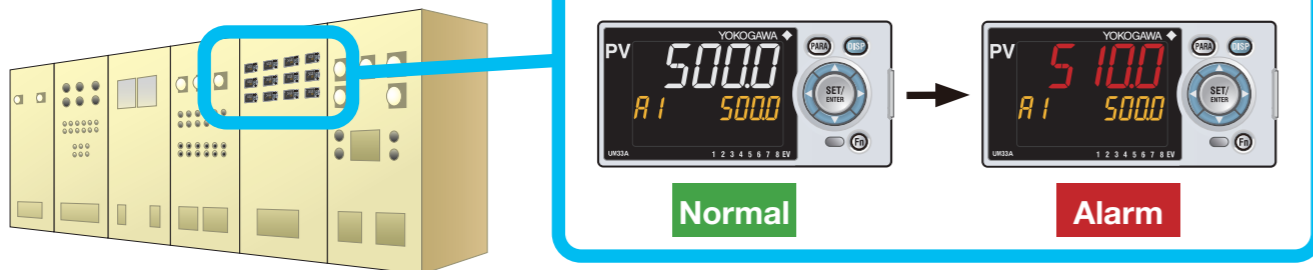

## LL50A Parameter Setting Software

Model	Suffix code	Description
LL50A	-00	Parameter Setting Software with Ladder Program Building Function

Parameter setting display

Program pattern creating display

Ladder program building display

Network profile creating display

Tuning display


LL50A contents

## SUPER Function suppresses overshoot

**SUPER**

The field-proven SUPER function utilizes a built-in operator experience and fuzzy theory to deliver fine control and suppress overshoot.

- When wishing to suppress overshoot
- When wishing to reduce the startup time
- When load changes are significant
- When setpoint is changed frequently

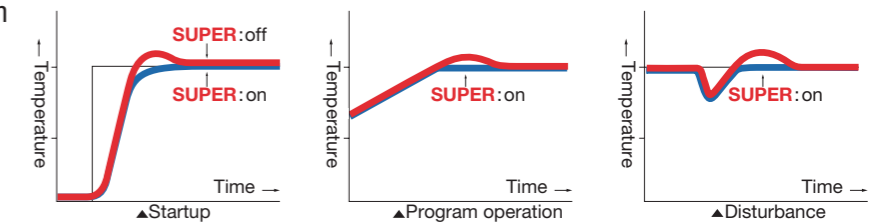


## SUPER2 Function suppresses hunting

**SUPER2**


The new SUPER2 function utilizes a built-in operator experience and modern control theory to deliver fine control and suppress hunting.

- With frequent load fluctuations
- With frequent external disturbances that take time to normalize
- When hunting still occurs after setpoint (SP) changes even if PID constants are set

### Effect 1: Material change or load change with the same PID.

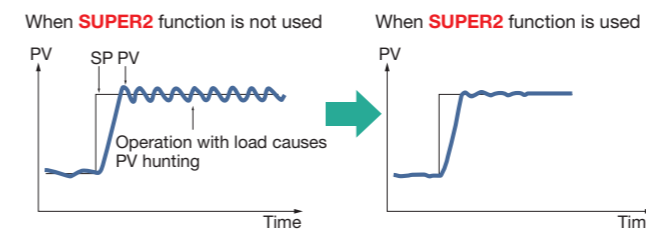

### Effect 2: Setpoint (SP) change with the same PID.

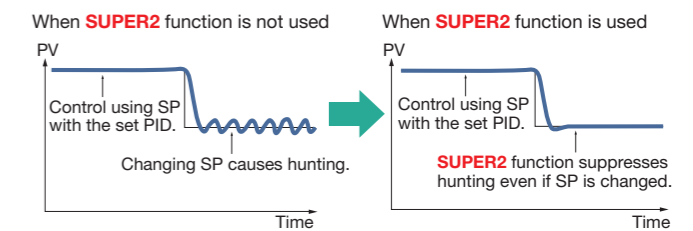

## Auto-Tuning (AT) Function

Autotuning is a function that evaluates process characteristics to automatically set optimal values relative to a target value that determines a PID constant. To implement autotuning, you can configure the following conditions.

- Two types of algorithms to calculate PID constants are available for selection.
  - Normal: Fast-rising PID constant
  - Stable: Slow-rising PID constant
- High and low output limits can be set individually for control output values during AT runtime.

## Quick Setting Function

Minimum parameters necessary for operation can be set.


## Security Function

The password function can prevent inadvertent changes to the parameter settings. If a password is set, the password is required when moving to the Setup Parameter Setting Display. When the password is verified, can be changed to the Setup Parameter Setting Display.



## Message Function

Using the message function and turning the contact input on/off, the message registered beforehand can be displayed on PV display by interrupt. The message is registered using LL50A Parameter Setting Software. The messages are limited to 20 alphanumeric characters. A maximum of four messages can be registered.

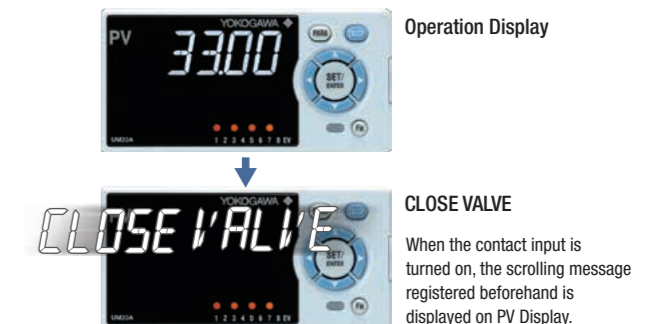

## Battery Free Memory Backup

Nonvolatile memory is used for memory parameters backup. Service life is improved because no batteries, backup capacitors, or other components are used.


# Related Instruments

## Temperature Controller TC10


### Small Cubic Controller



- Compact size (48 x 48 mm (1/16 DIN), depth 48 mm + 14 mm (terminals))
- Universal Input
- 3 colors active display
- Serial Communication

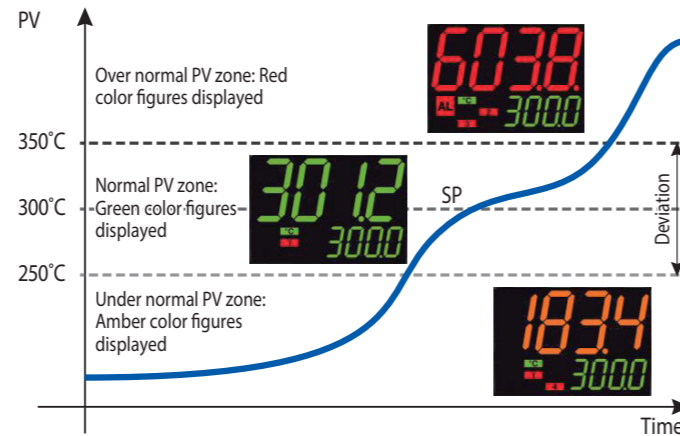

### Application

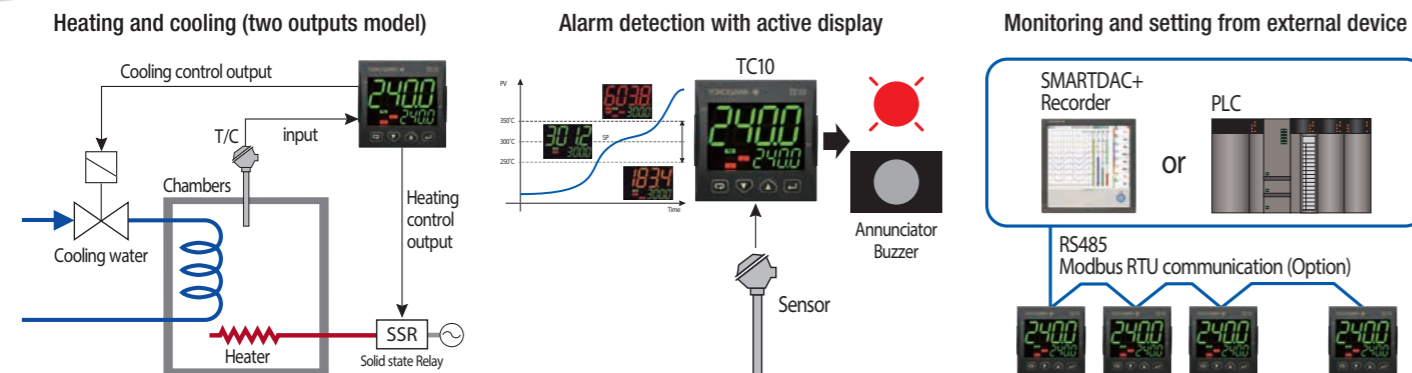

Model Code	Suffix codes								Description		
<b>TC10</b>	-N	<input type="checkbox"/>	C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	D	<input type="checkbox"/>	F	<input type="checkbox"/>	Temperature Controller with an universal input, one logic input, and one selectable I/O
Fixed code	-N										Always "-N"
Power supply	L	<input type="checkbox"/>									24 VAC/DC (Custom order)
	H	<input type="checkbox"/>									100 to 240 VAC
Fixed code			C								Always "C"
OUT1-3			R	N	N						Relay output for On/Off control
			R	R	R						Relay output with two alarm relays, or On/Off Heat/Cool control with one alarm
			V	N	N						DCV output for SSR
			V	R	R						DCV output for SSR with two alarm relays, or DCV and Relay output for Heat/Cool control with one alarm
			V	V	R						Two DCV outputs for SSR with one relay (Custom order)
			A	R	R						Analog output with two alarm relays, or Analog output and Relay output for Heat/Cool control with one alarm
IN/OUT4 (Fixed code)							D				Always "D" Selectable I/O (logic input / 12 V SSR drive output / 12 VDC 20 mA transmitter power supply)
Serial communication									S	<input type="checkbox"/>	RS485 Modbus
									N	<input type="checkbox"/>	None
Fixed code									F	<input type="checkbox"/>	Always "F"
Option code									/GK	<input type="checkbox"/>	Panel gasket for IP65


General Specifications: GS05C01E81-01EN

## Data Logging Software GA10

### Monitors and records data from a variety of instruments via networks



Broad support for data loggers, recorders, digital indicating controllers, signal conditioners, power monitors, and power meters. Even acquires data from Modbus devices.

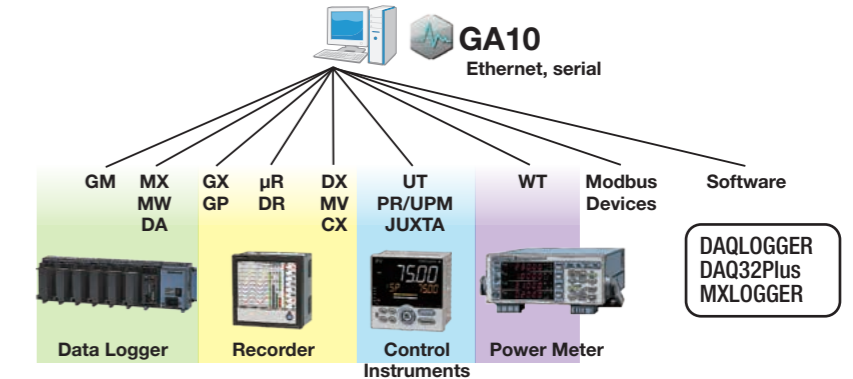


### Specifications (Overview)

- Max. connectable units: 100
- Max. recording tags (channels): 2000
- Max. recording MATH tags (channels): 200
- Max connectable clients: Unlimited (verified with 32)
- Scan interval: 100 ms or higher (using PC time), or scan interval of instruments (using instrument time)


General Specifications: GS 04L65B01-01E

## Paperless Recorder SMARTDAC+GX10/GX20

Read/write measured data on other instruments via Modbus protocol.

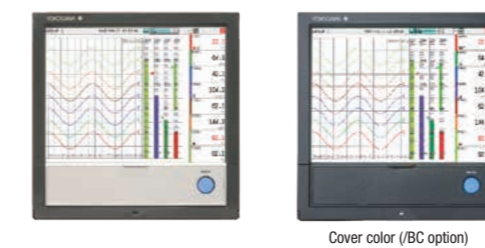

Modbus RTU (RS-422A/485 connection)

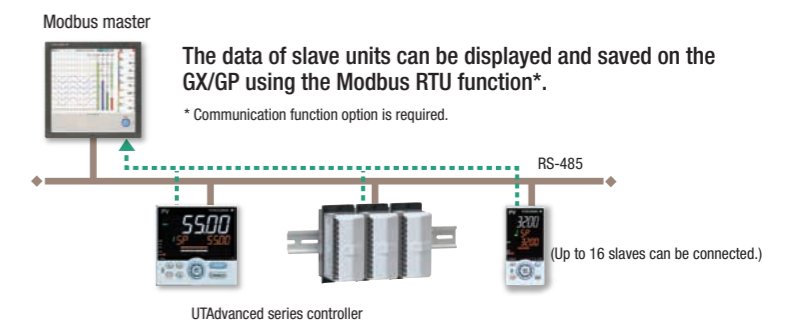

General Specifications: GS 04L51B01-01E

## RS232C/RS485 Converter ML2

The ML2 is a plugin type converter with 2 ports (RS-232C and RS-485) that performs isolation of communication signals, level conversion, and active control of drivers.

- Built-in RS-485 line termination resistance of 220 Ω (optional)
- Select auto or manual RS-485 driver active control
- Change communication speeds from 300 to 38400 bps in 8 stages with a rotary switch
- Echo-back ON/OFF switch (2-wire types only)
- Switch between 2-wire and 4-wire on the RS-485 side

General Specifications: GS 77J04L02-01E



**UTAdvanced™**

Find us on your favorite search engine

UTAdvanced

Search



[www.UTAdvanced.com](http://www.UTAdvanced.com)

**UTAdvanced™**

**Welcome to our reliable and secure lineup.**

Panel Mounting Type, DIN rail mounting type

UTAdvanced is a next-generation controller with greatly enhanced functions to meet the needs of customers in the field, worldwide.



Find answers to the most frequently asked questions.

FAQ : <http://www.yokogawa.com/ns/utadv/faq/>

**3-Year Warranty**  
36 months after shipment.

Co-innovating tomorrow, OpreX, and Synaptic Business Automation are trademarks or registered trademarks of Yokogawa Electric Corporation. All brand or product names of Yokogawa Electric Corporation in this bulletin are trademarks or registered trademarks of Yokogawa Electric Corporation. All other company brand or product names in this bulletin are trademarks or registered trademarks of their respective holders.

**NOTICE**

- Before operating the product, read the user's manual thoroughly for proper and safe operation.
- If this product is for use with a system requiring safeguards that directly involve personnel safety, please contact the Yokogawa sales offices.

**YOKOGAWA ELECTRIC CORPORATION**

Control Instruments Business Division  
E-mail: ns@cs.jp.yokogawa.com

<http://www.yokogawa.com/>

**YOKOGAWA CORPORATION OF AMERICA  
YOKOGAWA EUROPE B.V.  
YOKOGAWA ENGINEERING ASIA PTE. LTD.**

<http://www.yokogawa.com/us/>  
<http://www.yokogawa.com/eu/>  
<http://www.yokogawa.com/sg/>

Sign up for our free e-mail newsletter  
[www.yokogawa.com/ns/](http://www.yokogawa.com/ns/)

Subject to change without notice.  
All Rights Reserved. Copyright© 2015, Yokogawa Electric Corporation

Printed in Japan, 409(KP)  
[Ed : 04/b]

**YOKOGAWA** ◆ Co-innovating tomorrow™